

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
1 July 2004 (01.07.2004)

PCT

(10) International Publication Number
WO 2004/055842 A1

(51) International Patent Classification⁷: H01G 4/232, 13/00

(21) International Application Number:
PCT/SE2003/001970

(22) International Filing Date:
16 December 2003 (16.12.2003)

(25) Filing Language: Swedish

(26) Publication Language: English

(30) Priority Data:
0203748-9 17 December 2002 (17.12.2002) SE

(71) Applicant (for all designated States except US): ABB AB
[SE/SE]; Kopparbergsvägen 2, S-721 83 Västerås (SE).

(72) Inventor; and

(75) Inventor/Applicant (for US only): MILWERTZ, Per
[SE/SE]; Mosskatan 14, S-771 33 Ludvika (SE).

(74) Agent: ABB AB; Legal & Compliance/Intellectual Prop-
erty, Forskargränd 8, S-Västerås 721 78 (SE).

(81) Designated States (*national*): AE, AG, AL, AM, AT (utility model), AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ (utility model), CZ, DE (utility model), DE, DK (utility model), DK, DM, DZ, EC, EE (utility model), EE, EG, ES, FI (utility model), FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK (utility model), SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (*regional*): ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: POWER CAPACITOR

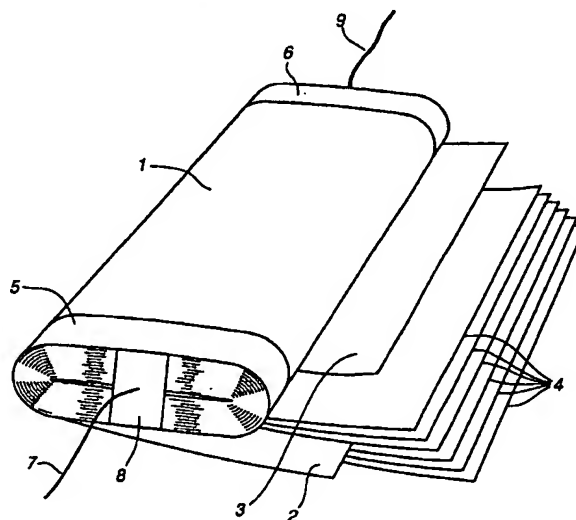

(57) Abstract: A method for manufacturing a power capacitor comprising at least one capacitor element (1), wherein the capacitor element (1) comprises a roll of alternate dielectric films (4) and electrode films (2, 3), wherein the roll has first and second end surfaces (5, 6), facing away from each other, in which said electrode films (2, 3) are connectably exposed. A solder tip (21) is preheated in a pot (20) with a preheated solder, and the solder tip is then coated with solder, whereupon at least one of the surfaces (5, 6) of the capacitor element is coated with solder by bringing the solder tip (21) into contact with said end surface (5, 6). The contact is thereafter brought to cease, and at least one lead (7, 9) is fixed by soldering to said end surface (5, 6). The invention also relates to equipment for carrying out such a method.